



## PTFE Schlauch EASY

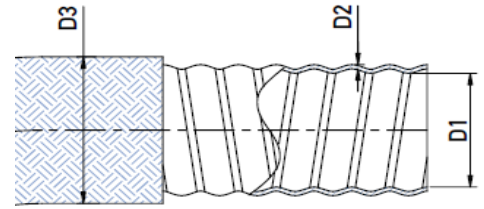

Grösse	D1 - Innen-Durchmesser mm		D2 - Wandstärke mm	D3 - Aussen-Durchmesser mm		Biegeradius mm	Betriebsdruck bar 20°C	Berstdruck	Gewicht gr/m
	min.	max.		min.	max.				
1/4"	6.10	6.70	0.75	9.30	9.90	18	172	512	140
5/16"	7.90	8.50	0.6	12.30	12.90	20	138	414	160
3/8"	9.50	10.20	0.65	12.80	14.50	20	138	414	152
1/2"	12.45	13.08	0.8	17.80	19.20	25	103	310	253
5/8"	15.70	16.38	0.8	21.80	24.00	51	83	248	304
3/4"	19.00	19.65	1	24.00	27.00	64	69	207	374
7/8"	21.84	22.86	1	27.94	27.46	76	57	172	460
1"	25.50	26.16	1	32.20	36.10	89	46	138	543
1 1/4"	31.95	32.46	1	40.20	41.30	125	34	103	635
1 1/2"	38.00	38.90	1	47.80	49.00	152	30	90	840
2"	50.90	51.90	1.1	60.50	62.30	200	23	69	1000

## PTFE Schlauch EASY Silikon

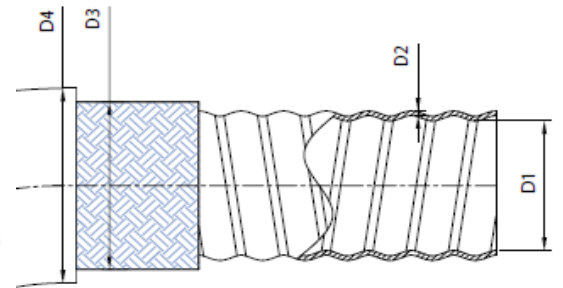

Grösse	D1* mm	D2 mm	D3** mm	D4 mm	Biegeradius mm	Betriebsdruck bar 20°C	Berstdruck	Gewicht gr/m
1/4"	6.20	0.76	9.6	15.60	18	172	512	340
5/16"	8.01	0.76	12.45	18.45	25	155	465	395
3/8"	9.50	0.76	13.46	19.46	22	138	414	426
1/2"	12.77	0.89	18.67	24.67	25	103	310	584
5/8"	15.88	0.89	22.1	27.10	51	83	248	627
3/4"	19.05	0.89	24.64	29.64	64	69	207	724
7/8"	22.35	0.89	28.7	33.70	76	57	172	855
1"	25.53	1.02	32.89	37.89	89	46	138	1036
1 1/4"	32.21	1.02	40.72	45.72	125	34	103	1218
1 1/2"	39.37	1.02	49.28	54.28	150	30	90	1361
2"	50.42	1.09	59.69	64.69	200	23	69	1624

\*tol. = ± 3%

\*\*tol. = ± 3%